

Rec'd PCT/PTO 25 APR 2005

(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property  
Organization  
International Bureau



(43) International Publication Date  
6 May 2004 (06.05.2004)

PCT

(10) International Publication Number  
WO 2004/037492 A1

(51) International Patent Classification: B25B 25/00,  
E04F 11/18, E04H 17/02

(21) International Application Number:  
PCT/AU2003/001419

(22) International Filing Date: 27 October 2003 (27.10.2003)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:  
2002952280 25 October 2002 (25.10.2002) AU

(81) Designated States (national): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM, ZW.

(84) Designated States (regional): ARIPO patent (GH, GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IT, LU, MC, NL, PT, RO, SE, SI, SK, TR), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).


(71) Applicant and  
(72) Inventor: VYVYAN-VIVIAN, John, Theodore  
[AU/AU]; 35 Finlay Crescent, Oak Beach, Queens-  
land 4871 (AU).

Published:  
— with international search report

(74) Agent: GRIFFITH HACK; GPO Box 3125, Brisbane,  
Queensland 4001 (AU).

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

(54) Title: TENSIONING SYSTEM

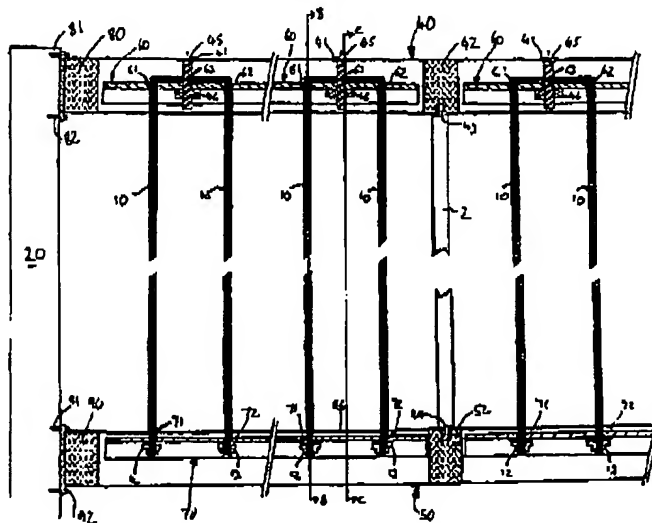

(57) Abstract: A tensioning system comprises one or more cable spacing members (60, 70) with a plurality of cable spacing portions for spacing apart a plurality of runs of cable (10) and a support (40, 50) for supporting the cable spacing member(s) (60, 70). One or more adjustable positioning members (45) for positioning the cable spacing member(s) (60, 70) relative to the support (40, 50) are provided. Adjustment of the one or more adjustable positioning members (45) positions the cable spacing member(s) (60, 70) relative to the support (40, 50) and adjusts the tension in the runs of cable (10). The cable spacing member(s) (60, 70) are preferably provided within the support (40, 50) with the runs of cable (10) extending through a longitudinal slot in the support (40, 50).

WO 2004/037492 A1